

UCS(F)...

EMERGENCY PUSH-BUTTON
WITH PROTECTION LIFT FLAP

PULSANTE DI EMERGENZA
CON PROTEZIONE LIFT FLAP

zone 1

zone 2

Ex de II

II2GD



T4 (130°C)



T6 (80°C)

zone 21

zone 22

Ex e [ia] IIC

II2(1)GD



Ex ia IIC

II2GD



IP66



T5 (95°C)



Caratteristiche:	Pulsante di allarme antincendio UCS(F)..., protezione ATEX (Exde), con protezione LIFT FLAP. FUNZIONAMENTO Manuale: (doppia azione) I contatti devono essere azionati alzando lo sportello (LIFT FLAP) e premendo il pulsante
Features:	<i>Fire alarm station UCS(F)..., model of protection ATEX (Exde), with protection LIFT FLAP.</i> OPERATION Manual: (double action) The contacts must be operated raising the flap (LIFT FLAP) and pressing the button.


Specifica tecnica - Technical specification

Materiale Material	UCS(F)...A Alluminio - Aluminium UCS(F)...G GRP glass fibre reinforced polyester UCS(F)...S Acc. Inox - Stainless steel 304/316
Dimensioni Dimension	UCS(F)...A 110x110x85mm (alternative dimension 170x110x85) UCS(F)...G 110x110x85mm (alternative dimension 170x110x85) UCS(F)...S 110x110x100mm (alternative dimension 200x100x100)
Colore Color	Rosso (altri a richiesta) Red (other on request)
Imbocchi Cable entries	1 gland M20 std execution on request: 1 gland M25 2 gland M20 or M25

Contatti manuali Manual contact		Contatti manuali Manual contact		Contatti manuali Manual contact	
UCS(F)-21A	1 NO	UCS(F)-21G	1 NO	UCS(F)-21S	1 NO
UCS(F)-22A	1 NC	UCS(F)-22G	1 NC	UCS(F)-22S	1 NC
UCS(F)-25A	1 NC + 1 NO	UCS(F)-25G	1 NC + 1 NO	UCS(F)-25S	1 NC + 1 NO
UCS(F)-27A	2 NC	UCS(F)-27G	2 NC	UCS(F)-27S	2 NC
UCS(F)-29A	2 NO	UCS(F)-29G	2 NO	UCS(F)-29S	2 NO
UCS(F)-30A	1 NO + 2 NC	UCS(F)-30G	1 NO + 2 NC	UCS(F)-30S	1 NO + 2 NC
UCS(F)-31A	2 NC + 1 NO	UCS(F)-31G	2 NC + 1 NO	UCS(F)-31S	2 NC + 1 NO
UCS(F)-32A	3 NC	UCS(F)-32G	3 NC	UCS(F)-32S	3 NC
UCS(L)-33A	3 NO	UCS(F)-33G	3 NO	UCS(F)-33S	3 NO


Features of the Contact 10 A
Caratteristiche dei contatti 10 A

I_{th} = 10 A; U_i = 415 V
AC
U_e = 380 V; I_e = 1,9 A or
U_e = 240 V; I_e = 3 A or
U_e = 120 V; I_e = 6 A
DC
U_e = 250 V; I_e = 0,27 A or
U_e = 125 V; I_e = 0,55 A or
U_e = 24 V; I_e = 2,87 A

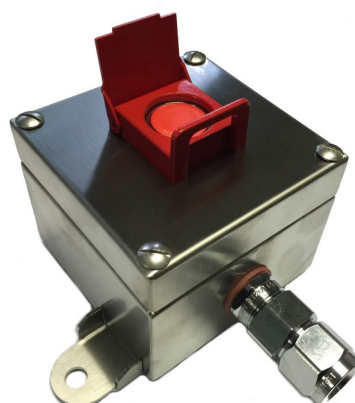

**COLOR
AVAILABLE
COLORI
DISPONIBILI**

BIANCO - WHITE
NERO - BLACK
VERDE - GREEN
ROSSO - RED
GIALLO - YELLOW
BLU - BLUE



Push button with 1
contact

ALTRE ESECUZIONI SPECIALI A RICHIESTA
OTHER SPECIAL EXECUTION ON REQUEST