

CXL - Universal Call Point

The CXL Universal Call Point combines a number of features into one package, simplifying selection and reducing stock variants. Designed to provide the facilities most frequently used, the Universal is the easy answer for the majority of conventional installations.




Technical Specification

Voltage	Up to 30Vdc
Resistors	470 / 680
Element Type	Glass / Plastic (resettable)
Temperature	- 10°C to + 55°C - 25°C to + 70°C (WP)
Protection	IP24D IP66 (WP)
Construction	ABS
Weight	0.19Kg 0.22Kg (WP)
Colours	Red*

* Other colours available - minimum order required.

KIT COMPRISES

- A CXL call point with high visibility LED alarm indicator
- Choice of connection for 470R or 680R resistors
- Fitted glass element
- Supplied resettable element with alarm flag
- Unique Test / reset / cover removal key
- Back box with fixing screws
- Installation leaflet with drilling template for back box

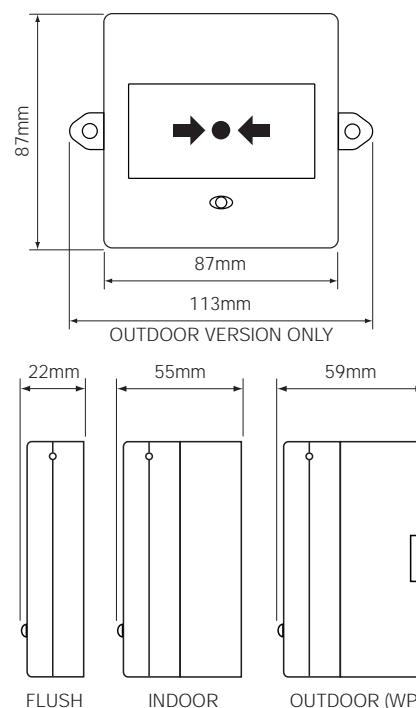

Features

- Choice of glass or plastic elements
- Changeover contacts
- Potted waterproof option
- Flag on re-settable element

Benefits

- Select depending on location and user preference
- Options for use with a wide range
- Suitable for outdoor use
- Quick, visible alarm identification

Reference

CXL/G/P/R/BB/470+680

Catalogue No.

4920016FULL-0018XC

Description

Conventional 470R/680R with LED and back box. Includes both glass and Universal plastic resettable elements

CXL/G/P/R/BB/470+680 WP

4990047FULL-0420X

Conventional IP66 470R/680R with LED and back box. Includes both Universal glass and plastic resettable elements

For full list of part numbers, turn to page 63