

FA 60 005 06



FA 60 005 08



FA 60 005 12





FA 60 005 15



FA 60 005 20



FA 60 005 30

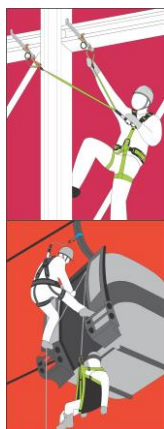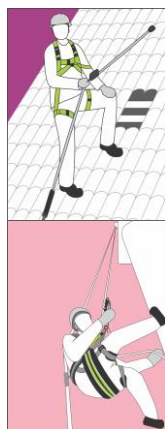

## HS CODE

63079098

## CARTON SIZE / PCS.

FA 60 005 06 : 60 x 40 x 24 cm / 100




FA 60 005 08/12/15/20/30 : 40 x 40 x 24 cm / 50

AET (UE) N°2777/10789-01/E01-01

Satra Technology Europe Ltd., N° 2777,  
 Bracetown Business Park, Clonee,  
 Dublin, D15YN2P, Ireland

## MODULE D 11 IN14/14003

SGS United Kingdom Ltd., N°0120  
 Unit 202B, Worle Parkway,  
 Weston-super-Mare, BS22 6WA, United Kingdom

REF.	<b>FA 60 005 XX</b>
CE	EN 795:2012 Type B EN 566
	x1
LG.	0.6 m   0.8 m   1.2 m   1.5 m   2.0 m   3.0 m
MAT.	 20 mm PES
R (kN) / MBS (kN)	22 kN / 30 kN
	0.07 kg   0.09 kg   0.13 kg   0.16 kg   0.21 kg   0.33 kg



**Nombre d'utilisateurs**  
Number of users  
**Cantidad de usuarios**  
Quantità di utilizzatori  
**Anzahl der Benutzer**

**R (kN) / MBS (kN)**

**Résistance statique (en kN) / Résistance à la rupture**  
Static strength / Minimum Breaking Strength  
**Resistencia estática (en kN) / Resistencia a la ruptura (en kN)**  
Resistenza statica (in kN) / Resistenza alla rottura (in kN)  
**Statische Festigkeit (in kN) / Bruchfestigkeit (in kN)**